


# Falcon Series

Vertical Axis Wind Turbines (VAWT)

**WEPOWER**<sup>™</sup>

From Foreign Dependent to  
**Mother Nature Independent**

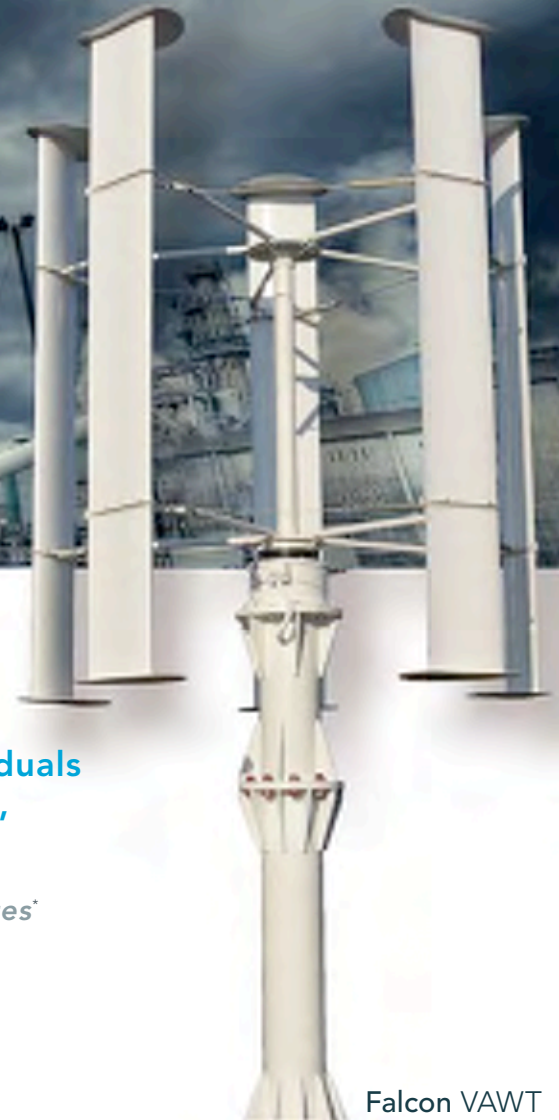

**WePOWER is about change...**

**About providing a greener tomorrow...**

**About enabling communities, businesses and individuals to harness the power of wind as a source of natural, free, clean and renewable energy.**

- **Eligible for 30% Federal + State and Utility Incentives/Rebates\***  
Details at Department of Energy: [www.dsireusa.org](http://www.dsireusa.org)
- Reduces Fossil Fuel Emissions and Carbon Footprint
- Aesthetically and Architecturally Pleasing
- Environmentally Friendly - Bird Safe, No Hazardous Fluids
- Few Moving Parts
- Extremely Quiet (Nearly Silent and Vibration Free)
- Captures Wind From any Direction
- Turbine Design Operates More Efficiently at Low Wind Speeds
- Generator Matched to Maximize Power from Low Wind Speeds
- Engineered to Last 20 years
- Virtually No Maintenance
- 5-Year Warranty

Falcon VAWT

[www.WEPOWER.us](http://www.WEPOWER.us)  
[sales@wepower.us](mailto:sales@wepower.us)  
866 385-WIND (9463)

32 JOURNEY SUITE 250  
ALISO VIEJO, CA 92656

# Falcon Series

Vertical Axis Wind Turbine (VAWT)

**WEPOWER™**

TECHNICAL SPECIFICATIONS	FALCON MODELS				
	600W	1.2kW	3.4kW	5.5kW	12kW
<b>Annual Energy Production</b>					
Assuming Wind Capture 20-40% of the Time at Rated Speed	1,130 kWh - 2,270 kWh Annually*	2,100 kWh - 4,200 kWh Annually*	5,950 kWh - 11,900 kWh Annually*	9,630 kWh - 19,270 kWh Annually*	21,000 kWh - 42,000 kWh Annually*
<b>Performance</b>					
Instantaneous Rated Power	600W*	1.2kW*	3.4kW*	5.5kW*	12kW*
Rated Wind Speed	29 mph (13 m/s)	29 mph (13 m/s)	29 mph (13 m/s)	29 mph (13 m/s)	29 mph (13 m/s)
Cut-In Speed	6 mph (2.7 m/s)	6 mph (2.7 m/s)	6 mph (2.7 m/s)	6 mph (2.7 m/s)	6 mph (2.7 m/s)
Maximum Wind Speed	111 mph (49.6 m/s)	111 mph (49.6 m/s)	111 mph (49.6 m/s)	111 mph (49.6 m/s)	111 mph (49.6 m/s)
<b>Physical Parameters</b>					
Size Rotor Diameter X Blade Length	5'5" (1.3m) X 3'3" (1m)	5'10" (1.78m) X 6'7" (2m)	9'10" (3m) X 11'10" (3.6m)	13'1" (4m) X 15'1" (4.6m)	19'8" (6m) X 20'4" (6.2 m)
Tower Height	18' (5.5m)	18' (5.5m)	18' (5.5m)	18' (5.5m)	18' (5.5m)
Gross Weight Excluding Tower	194 lbs (88 kg)	350 lbs (160 kg)	1,393 lbs (633 kg)	2,167 lbs (985 kg)	4,190 lbs (1905 kg)
<b>Noise Level</b>					
15 mph (6.7 m/s) @ 9' distance (3m)	32 dB	32 dB	32 dB	32 dB	32 dB
<b>Output Controller</b>					
Output Voltage (Off Grid)	24V DC	48V DC	48V DC	48V DC	48V DC
Output Voltage (Grid Connected)	200~400V AC	200~400V AC	200~400V AC	250~500V AC	250~500V AC
<b>Generator</b>					
Type	Permanent Magnet Direct Drive	Permanent Magnet Direct Drive	Permanent Magnet Direct Drive	Permanent Magnet Direct Drive	Permanent Magnet Direct Drive
Rated Temperature	-40°F to 239°F (-40°C to 115°C)	-40°F to 239°F (-40°C to 115°C)	-40°F to 239°F (-40°C to 115°C)	-40°F to 239°F (-40°C to 115°C)	-40°F to 239°F (-40°C to 115°C)
<b>Grid Connected Inverter</b>					
Input (DC) The grid connected inverter is supplied to meet local grid specifications.	200~400V DC	200~400V DC	200~400V DC	250~500V DC	250~500V DC
<b>Electronic Overspeed Protection</b>					
Governed Speed Style	Electronic Dump Load	Automatic Aerodynamic Variable Pitch	Automatic Aerodynamic Variable Pitch	Automatic Aerodynamic Variable Pitch	Automatic Aerodynamic Variable Pitch
Secondary Brake	Automatic Electromagnetic	Automatic Electromagnetic	Automatic Electromagnetic	Automatic Electromagnetic	Automatic Electromagnetic

[www.WEPOWER.us](http://www.WEPOWER.us)  
[sales@wepower.us](mailto:sales@wepower.us)  
 866 385-WIND (9463)

California  
Energy  
Commission



32 JOURNEY SUITE 250  
ALISO VIEJO, CA 92656

# Falcon 600W

Vertical Axis Wind Turbine (VAWT)

WEPOWER™



Suitable for any Application; Urban to Rural, Residential to Commercial, Industrial to Institutional

## TECHNICAL SPECIFICATIONS :

### Performance

Instantaneous Rated Power	600W*
Rated Wind Speed	29 mph (13 m/s)
Cut-In Speed	6 mph (2.7 m/s)
Maximum Wind Speed	111 mph (49.6 m/s)

### Annual Energy Production

Assuming Wind Capture 1,130 kWh - 2,270 kWh Annually\*  
20-40% of the Time at  
Rated Speed

### Physical Parameters

Size	5'5" (1.3m) Rotor Diameter X 3'3" (1m) Blade Length
Tower Height	18' (5.5m)
Gross Weight	194 lbs (88 kg) Excluding Tower

### Noise Level

15 mph (6.7 m/s) @ 9' distance (3m)	32 dB
--	-------

### Output Controller

Output Voltage	24V DC (Off Grid)
Output Voltage	200~400V AC (Grid Connected)

### Generator

Type	Permanent Magnet Direct Drive
Rated Temperature	-40°F to 239°F (-40°C to 115°C)

### Grid Connected Inverter


Input (DC)	200~400V DC
------------	-------------

The grid connected inverter is supplied to meet local grid specifications.

### Electronic Overspeed Protection

Governed Speed Style	Electronic Dump Load
Secondary Brake	Mechanical Drum

### 600W Power Curve

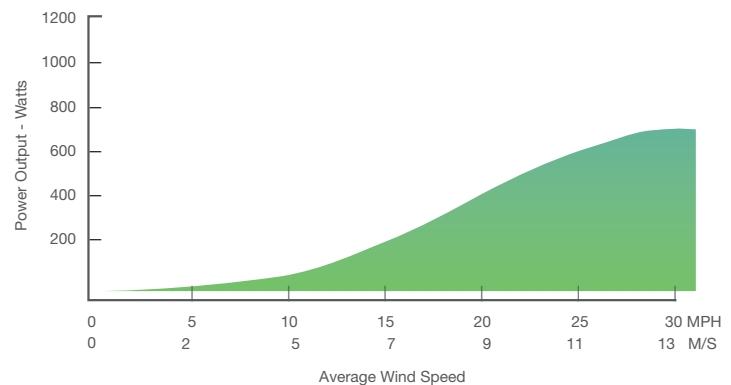

Fully Equipped for Grid Connection

Fully Eligible for 30% Federal + State  
and Utility Incentives/Rebates\*\*

Details at Department of Energy: [www.dsireusa.org](http://www.dsireusa.org)

Fully Eligible for Utility Company  
Net Metering

**\$4,990 (+ shipping and installation)**

[www.WEPOWER.us](http://www.WEPOWER.us)  
[sales@wepower.us](mailto:sales@wepower.us)  
866 385-WIND (9463)

California  
Energy  
Commission



32 JOURNEY SUITE 250  
ALISO VIEJO, CA 92656

The information contained herein may change without notice. \*Individual performance results may vary. \*\*Subject to applicable regulations, restrictions and requirements.  
(C) Copyright 2009 WePOWER, LLC. All rights reserved.

# Falcon 1.2 kW

Vertical Axis Wind Turbine (VAWT)

WEPOWER™



Suitable for any Application; Urban to Rural, Residential to Commercial, Industrial to Institutional

## TECHNICAL SPECIFICATIONS :

### Performance

Instantaneous Rated Power	1.2kW*
Rated Wind Speed	29 mph (13 m/s)
Cut-In Speed	6 mph (2.7 m/s)
Maximum Wind Speed	111 mph (49.6 m/s)

### Annual Energy Production

Assuming Wind Capture 2,100 kWh - 4,200 kWh Annually\*  
20-40% of the Time at  
Rated Speed

### Physical Parameters

Size	5'10" (1.78m) Rotor Diameter X 6'7" (2m) Blade Length
Tower Height	18' (5.5m)
Gross Weight	350 lbs (160 kg) Excluding Tower

### Noise Level

15 mph (6.7 m/s) @ 9' distance (3m)	32 dB
--	-------

### Output Controller

Output Voltage	48V DC (Off Grid)
Output Voltage	200~400V AC (Grid Connected)

### Generator

Type	Permanent Magnet Direct Drive
Rated Temperature	-40°F to 239°F (-40°C to 115°C)

### Grid Connected Inverter


Input (DC)	200~400V DC
------------	-------------

The grid connected inverter is supplied to meet local grid specifications.

### Electronic Overspeed Protection

Governed Speed Style	Automatic Aerodynamic Variable Pitch
Secondary Brake	Mechanical Drum

### 1.2kW Power Curve

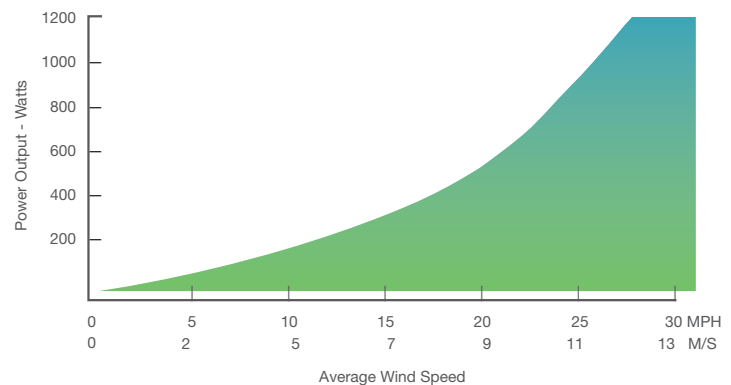

Fully Equipped for Grid Connection

Fully Eligible for 30% Federal + State  
and Utility Incentives/Rebates\*\*

Details at Department of Energy: [www.dsireusa.org](http://www.dsireusa.org)

Fully Eligible for Utility Company  
Net Metering

**\$6,890** (+ shipping and installation)

[www.WEPOWER.us](http://www.WEPOWER.us)  
[sales@wepower.us](mailto:sales@wepower.us)  
866 385-WIND (9463)

California  
Energy  
Commission



32 JOURNEY SUITE 250  
ALISO VIEJO, CA 92656

The information contained herein may change without notice. \*Individual performance results may vary. \*\*Subject to applicable regulations, restrictions and requirements.  
(C) Copyright 2009 WePOWER, LLC. All rights reserved.

# Falcon 3.4kW

Vertical Axis Wind Turbine (VAWT)



Suitable for any Application; Urban to Rural, Residential to Commercial, Industrial to Institutional

## TECHNICAL SPECIFICATIONS :

### Performance

Instantaneous Rated Power	3.4kW*
Rated Wind Speed	29 mph (13 m/s)
Cut-In Speed	6 mph (2.7 m/s)
Maximum Wind Speed	111 mph (49.6 m/s)

### Annual Energy Production

Assuming Wind Capture 20-40% of the Time at Rated Speed 5,950 kWh - 11,900 kWh Annually\*

### Physical Parameters

Size	9'10" (3m) Rotor Diameter X 11'10" (3.6m) Blade Length
Tower Height	18' (5.5m)
Gross Weight	1,393 lbs (633 kg) Excluding Tower

### Noise Level

15 mph (6.7 m/s) @ 9' distance (3m)	32 dB
--	-------

### Output Controller

Output Voltage	48V DC (Off Grid)
Output Voltage	200~400V AC (Grid Connected)

### Generator

Type	Permanent Magnet Direct Drive
Rated Temperature	-40°F to 239°F (-40°C to 115°C)

### Grid Connected Inverter


Input (DC)	200~400V DC
------------	-------------

The grid connected inverter is supplied to meet local grid specifications.

### Electronic Overspeed Protection

Governed Speed Style	Automatic Aerodynamic Variable Pitch
Secondary Brake	Automatic Electromagnetic

### 3.4kW Power Curve

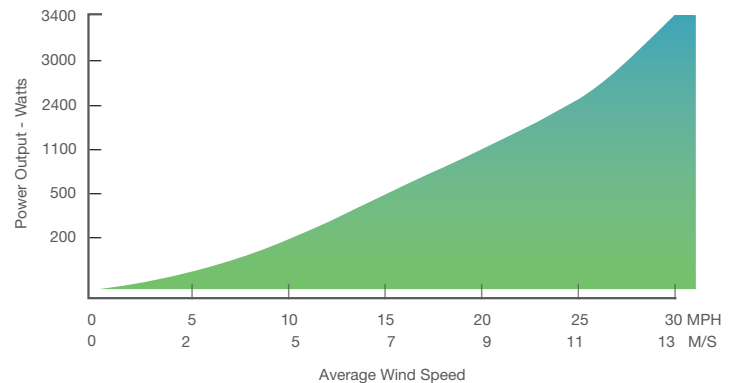

Fully Equipped for Grid Connection

Fully Eligible for 30% Federal + State and Utility Incentives/Rebates\*\*

Details at Department of Energy: [www.dsireusa.org](http://www.dsireusa.org)

Fully Eligible for Utility Company Net Metering

\$15,390 (+ shipping and installation)

[www.WEPOWER.us](http://www.WEPOWER.us)  
[sales@wepower.us](mailto:sales@wepower.us)  
866 385-WIND (9463)

California  
Energy  
Commission



32 JOURNEY SUITE 250  
ALISO VIEJO, CA 92656

The information contained herein may change without notice. \*Individual performance results may vary. \*\*Subject to applicable regulations, restrictions and requirements.  
(C) Copyright 2009 WePOWER, LLC. All rights reserved.

# Falcon 5.5kW

Vertical Axis Wind Turbine (VAWT)

WEPOWER™



Suitable for any Application; Urban to Rural, Residential to Commercial, Industrial to Institutional

## TECHNICAL SPECIFICATIONS :

### Performance

Instantaneous Rated Power	5.5kW*
Rated Wind Speed	29 mph (13 m/s)
Cut-In Speed	6 mph (2.7 m/s)
Maximum Wind Speed	111 mph (49.6 m/s)

### Annual Energy Production

Assuming Wind Capture 20-40% of the Time at Rated Speed 9,630 kWh - 19,270 kWh Annually\*

### Physical Parameters

Size	13'1" (4m) Rotor Diameter X 15'1" (4.6m) Blade Length
Tower Height	18' (5.5m)
Gross Weight	2,167 lbs (985 kg) Excluding Tower

### Noise Level

15 mph (6.7 m/s) @ 9' distance (3m)	32 dB
--	-------

### Output Controller

Output Voltage	48V DC (Off Grid)
Output Voltage	250~500 AC (Grid Connected)

### Generator

Type	Permanent Magnet Direct Drive
Rated Temperature	-40°F to 239°F (-40°C to 115°C)

### Grid Connected Inverter


Input (DC)	250~500 DC
------------	------------

The grid connected inverter is supplied to meet local grid specifications.

### Electronic Overspeed Protection

Governed Speed Style	Automatic Aerodynamic Variable Pitch
Secondary Brake	Automatic Electromagnetic

### 5.5kW Power Curve

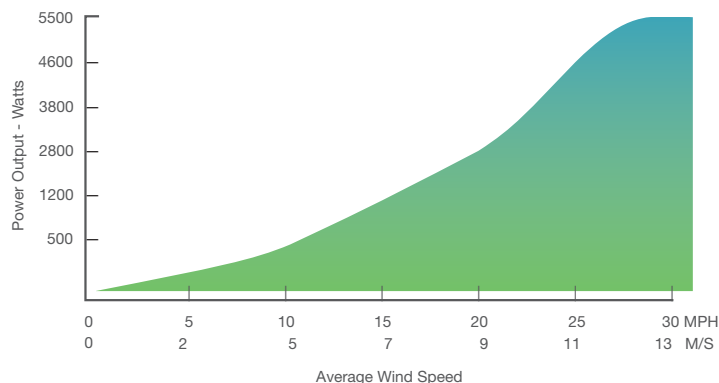

Fully Equipped for Grid Connection

Fully Eligible for 30% Federal + State and Utility Incentives/Rebates\*\*

Details at Department of Energy: [www.dsireusa.org](http://www.dsireusa.org)

Fully Eligible for Utility Company Net Metering

\$24,290 (+ shipping and installation)

[www.WEPOWER.us](http://www.WEPOWER.us)  
[sales@wepower.us](mailto:sales@wepower.us)  
866 385-WIND (9463)

California  
Energy  
Commission



32 JOURNEY SUITE 250  
ALISO VIEJO, CA 92656

The information contained herein may change without notice. \*Individual performance results may vary. \*\*Subject to applicable regulations, restrictions and requirements.  
(C) Copyright 2009 WePOWER, LLC. All rights reserved.

# Falcon 12kW

Vertical Axis Wind Turbine (VAWT)

WEPOWER™



Suitable for any Application; Urban to Rural, Residential to Commercial, Industrial to Institutional

## TECHNICAL SPECIFICATIONS :

### Performance

Instantaneous Rated Power	12kW*
Rated Wind Speed	29 mph (13 m/s)
Cut-In Speed	6 mph (2.7 m/s)
Maximum Wind Speed	111 mph (49.6 m/s)

### Annual Energy Production

Assuming Wind Capture 21,000 kWh - 42,000 kWh Annually\*  
20-40% of the Time at  
Rated Speed

### Physical Parameters

Size	19'8" (6m) Rotor Diameter X 20'4" (6.2 m) Blade Length
Tower Height	18' (5.5m)
Gross Weight	4,190 lbs (1905 kg) Excluding Tower

### Noise Level

15 mph (6.7 m/s) @ 9' distance (3m)	32 dB
--	-------

### Output Controller

Output Voltage	48V DC (Off Grid)
Output Voltage	250~500 AC (Grid Connected)

### Generator

Type	Permanent Magnet Direct Drive
Rated Temperature	-40°F to 239°F (-40°C to 115°C)

### Grid Connected Inverter


Input (DC)	250~500 DC
------------	------------

The grid connected inverter is supplied to meet local grid specifications.

### Electronic Overspeed Protection

Governed Speed Style	Automatic Aerodynamic Variable Pitch
Secondary Brake	Automatic Electromagnetic

### 12kW Power Curve

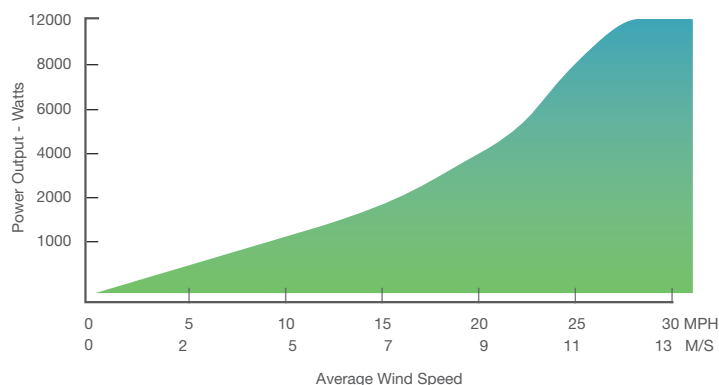

Fully Equipped for Grid Connection

Fully Eligible for 30% Federal + State  
and Utility Incentives/Rebates\*\*

Details at Department of Energy: [www.dsireusa.org](http://www.dsireusa.org)

Fully Eligible for Utility Company  
Net Metering

**\$41,190 (+ shipping and installation)**

[www.WEPOWER.us](http://www.WEPOWER.us)  
[sales@wepower.us](mailto:sales@wepower.us)  
866 385-WIND (9463)

California  
Energy  
Commission



32 JOURNEY SUITE 250  
ALISO VIEJO, CA 92656

The information contained herein may change without notice. \*Individual performance results may vary. \*\*Subject to applicable regulations, restrictions and requirements.  
(C) Copyright 2009 WePOWER, LLC. All rights reserved.